

定位組件系列 Positioning Components Series


GLK

導位固定塊組件 Locating Block Sets




輔助器、定位塊系列



公件/Male
 材質 YK30
 硬度 HRC50°~55°
 母件/Female
 材質 YK30
 硬度 HRC55°~60°

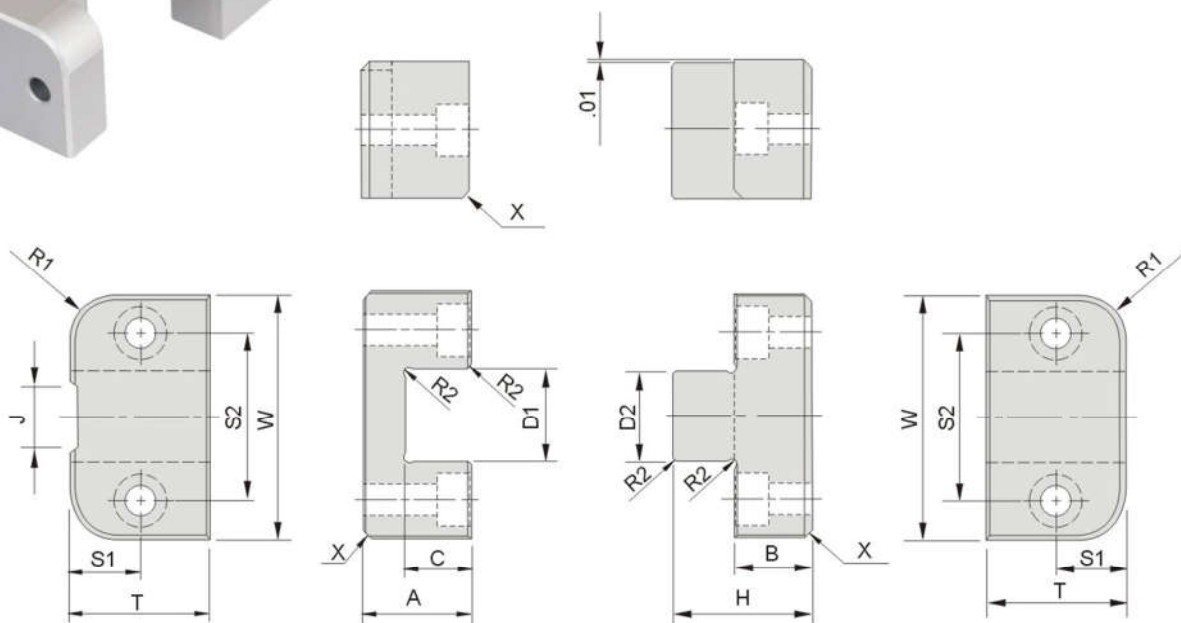

使用例 Diagram



英制: inch

| Type No. | W 0 -0.004 | T | A | B | C | D1 +0.004 +0.002 | D2 0 -0.002 | H | J | R1 | R2 | S1 | S2 | X | SHCS | 單價 | |
|----------|------------------|-------|-------|------|-------|------------------------|-------------------|-------|----------|-----|-----|--------|-------|-----|---------|----|---|
| | | | | | | | | | | | | | | | | ① | ② |
| GLK15 | 1.5000 | 1.000 | .875 | .375 | .500 | .5000 | .5000 | .843 | 3/8x1/16 | .28 | .06 | .5000 | 1.000 | .04 | #10-32 | ○ | ○ |
| GLK20 | 2.0000 | 1.125 | .875 | .625 | .500 | .7500 | .7500 | 1.110 | 1/2x1/16 | .40 | .06 | .5625 | 1.375 | .04 | 1/4-20 | ○ | ○ |
| GLK25 | 2.5000 | 1.500 | 1.375 | .625 | .750 | 1.0000 | 1.0000 | 1.344 | 1/2x1/16 | .40 | .08 | .7500 | 1.750 | .04 | 1/4-20 | ○ | ○ |
| GLK30 | 3.0000 | 1.750 | 1.250 | .875 | .750 | 1.1250 | 1.1250 | 1.610 | 3/4x3/32 | .53 | .09 | .8750 | 2.250 | .06 | 5/16-18 | ○ | ○ |
| GLK35 | 3.5000 | 2.000 | 1.750 | .750 | 1.000 | 1.5000 | 1.5000 | 1.718 | 3/4x3/32 | .53 | .09 | 1.0000 | 2.500 | .06 | 3/8-16 | ○ | ○ |

Order: GLK 15 - Q'TY