


MATERIAL PVC

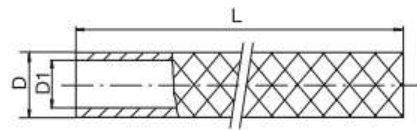

Part No.	D1	D	L (m)	Colour	Working Pressure (Bar)	Burst Pressure (Bar)	Bend Radius	
P10T	10	16	30	○	17	51	65	1
P10B	10	16	30	●	17	51	65	1
P10R	10	16	30	●	17	51	65	1
P13T	13	19	30	○	15	45	85	1
P13B	13	19	30	●	15	45	85	1
P13R	13	19	30	●	15	45	85	1
P19T	19	26	30	○	10	30	125	1
P19B	19	26	30	●	10	30	125	1
P19R	19	26	30	●	10	30	125	1

Description

Tube:
Transparent soft PVC hose for low temperature water and air.

Reinforcement:
High-strength PES fiber.

Cover:
Clear, blue or red transparent soft PVC.
Resistant to abrasion, ozone, and weather.

Applications:
Flexible hose designed for cold water for mould temperature controlling.

Temperature range:
Working temperature: Up to +60°C (+140°F)
peak up to +90°C (+194°F)
Note: Lifetime of this hose will be substantially reduced if operating temperatures exceed +60°C (+140°F).

Tolerances:
UNI EN ISO 1307/97 tolerances for inside diameters up to and including 25 mm.

On inside diameter:
for I.D. 5.1 up to 20 mm ± 0.80 mm
Length tolerance: ± 1%